


Floor Lamp | 220-240 V | topLED 25 W 600 mA | CRI 90  
8545

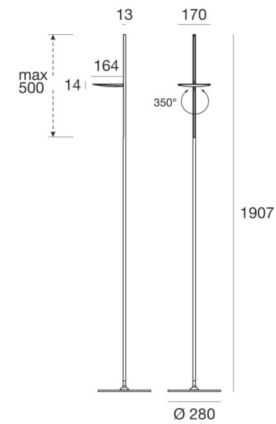

Technical data	
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	25 W
Luminous flux (source)	3000 lm
Frequency	60 - 50 Hz
CCT / Tonaltà	3000 K
Colour rendering index	90 Ra
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	Yes
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	4 m
Electric socket	Type F+E
Resin potting	No

### Finishing casing

Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

### Finishing diffuser

Material	PC
Colour	opaline
Processing	Satin finishing

### Finishing mounting frame

Material	steel
Colour	embossed white RAL 9003
Processing	Coating

Floor Lamp | 220-240 V | topLED 25 W 600 mA | CRI 90  
8545

Single emission floor lamp for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3000 lm, with a 120.0 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a satin finishing treatment; the mounting frame is made of steel, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; The power supply driver is included in the delivery.

The total absorbed power is 25 W. The power supply cable is included and features.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	44 %
Luminous flux (source)	3000 lm
Luminaire luminous flux	1324 lm
Consumption	25 W
Luminaire efficacy	52 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20 80H

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 28
UGR axial	> 28

OPTICAL	
Light distribution simmetry	Symmetrical
Optica C0/C180	112°

