



Ceiling Lights | 220-240 V | 1xE27  
10128

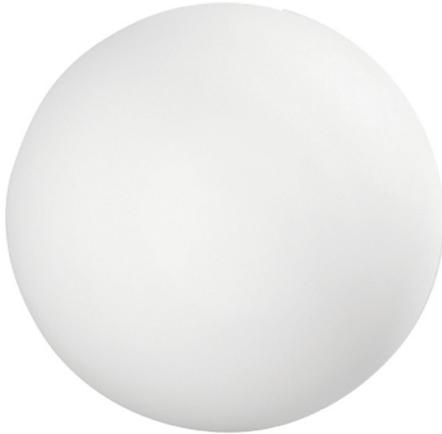

| Technical data                                 |                  |
|--|------------------|
| Type   | Surface          |
| Installation position                          | Ceiling          |
| Installation environment                       | Indoor           |
| Lamp cap                                       | 1 x E27 Max 57W  |
| Frequency                                      | 50-60 Hz         |
| Optics   | General Lighting |
| Safety class                                   | 2                |
| IP   | IP20             |
| Glow wire test                                 | 650°             |
| Direct mounting on normally flammable surfaces | Yes              |
| CE   | Yes              |
| ETL  | No               |
| Fire Rated (BS 476 PT21 compliant)             | No               |
| Induction                                      | No               |
| Emergency mode                                 | No               |
| Motion sensor                                  | No               |
| Directional                                    | No               |
| Tilting  | No               |
| Walk-over                                      | No               |
| Drive-over                                     | No               |
| Cable included                                 | No               |
| Resin potting                                  | No               |
| Type of light emission                         | Double emission  |
| Net weight                                     | 7.050 Kg         |

| Finishing diffuser |         |
|--------------------|---------|
| Material           | PE      |
| Colour             | neutral |

## Ceiling Lights | 220-240 V | 1xE27 10128

Double emission ceiling lights for indoor application. Compatibility: LED lamp, compact fluo 30 W, halogen 57 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP20; the total weight is of 7.050 kg.

The device features protection class II and can be ceiling-mounted.

| Illuminotechnical Features  |             |
|-----------------------------|-------------|
| Light Output Ratio (LOR)    | 77 %        |
| Luminous flux (source)      | 915 lm      |
| Luminaire luminous flux     | 712 lm      |
| Consumption                 | 57 W        |
| Luminaire efficacy          | 16 lm/W     |
| Colour rendering index      | 100 Ra      |
| OPTICAL                     |             |
| Light distribution simmetry | Symmetrical |
| C0/C180 optics              | 180°        |

