




Wall Lights | 220-240 V | 1xR7s
1003



Technical data	
Installation position	Wall lights
Installation environment	Indoor
Power	1 x 120 W
Lamp cap	1 x R7s
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	frontal
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.800 Kg

Finishing casing	
Material	Iron
Colour	nickel
Processing	Electroplating

Finishing diffuser	
Material	Glass
Colour	transparent
Processing	Silk-screening

Finishing mounting frame	
Material	Iron
Colour	white
Processing	Coating

Wall Lights | 220-240 V | 1xR7s
1003


Double emission wall lights for indoor application. Halogen lamp included 120W, lamp cap 1xR7s.

The device body is made of iron and features a nickel finish, processed by means of electroplating; the diffuser is made of glass with a silk-screening treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0.800 kg.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	67 %
Luminous flux (source)	2250 lm
Luminaire luminous flux	1509 lm
Consumption	120 W
Luminaire efficacy	18 lm/W
Colour temperature	2900 K
Colour rendering index	100 Ra

OPTICAL	
Light distribution symmetry	Asymmetrical
Optica C90/C270	116°

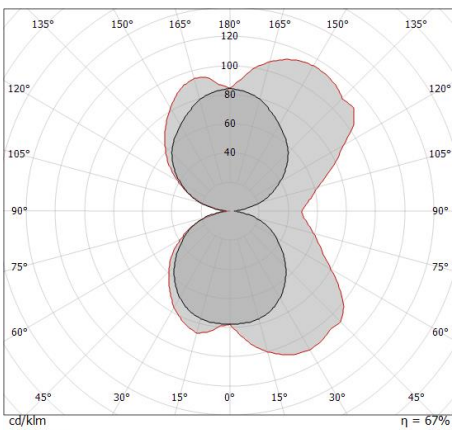

Distance [m]	Cone diameter [m]	E(0°) E(C90)	80.0°	699 1
0.5	5.67	E(0°) E(C90)	80.0°	175 0
1.0	11.34	E(0°) E(C90)	80.0°	78 0
1.5	17.01	E(0°) E(C90)	80.0°	44 0
2.0	22.69	E(0°) E(C90)	80.0°	28 0
2.5	28.36	E(0°) E(C90)	80.0°	19 0
3.0	34.03	E(0°) E(C90)	80.0°	

Distance [m] Cone diameter [m] Illuminance [lx]

— C90/C270 (Half-peak divergence: 160.0°)